
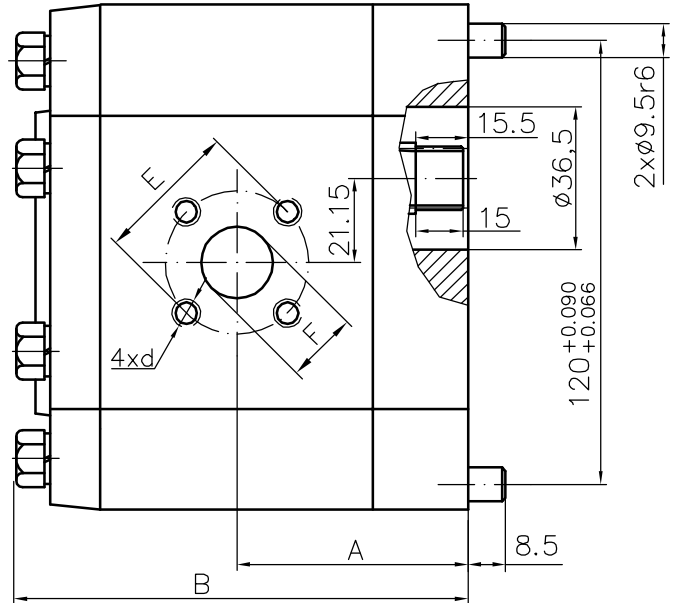


Designed as a second section of multiple gear pumps group 33.

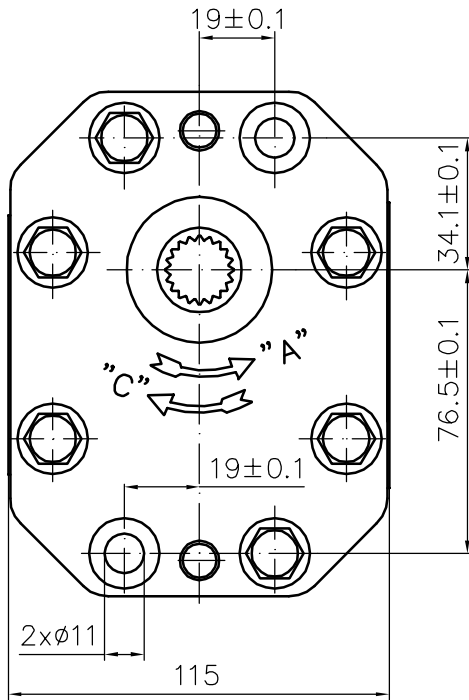

Type	Displacement cm ³ /rev	Flow		Pressure P _{nom} bar	max Speed n rpm	Dimension							
		at 1500 rpm l/min	at max rpm l/min			A mm	B mm	Inlet			Outlet		
								E	d	F	E	d	F
30A(C)20X339H	20	28,2	56,4	250	3000	58,5	118,9	40	M8	19	40	M8	19
30A(C)22,2X339H	22,5	31,7	63,5	250	3000	60,0	121,9						
30A(C)25X339H	25	35,3	70,5	250	3000	60,8	123,3						
30A(C)28X339H	28	39,5	79,0	250	3000	62,5	126,9						
30A(C)32X339	32	45,1	75,2	250	2500	64,2	130,5	55	M8	27	55	M8	19
30A(C)32X339H	32	45,1	90,2	250	3000	68,8	139,5						
30A(C)36X339	36	50,8	84,6	250	2500	65,7	133,6						
30A(C)36X339H	36	51,3	95,8	250	2800	70,5	142,7						
30A(C)42X339	42	59,9	91,8	230	2300	68,5	139,2	55	M8	27	55	M8	19
30A(C)42X339H	42	59,9	99,8	230	2500	73,2	148,3						
30A(C)46X339H	46	65,6	100,5	230	2300	75,1	152,0						
30A(C)50X339H	50	71,3	99,8	200	2100	76,9	155,6						
30A(C)55X339H	55	78,4	91,4	200	1750	79,1	160,1	55	M8	27	55	M8	19
30A(C)60X339H	60	85,5	99,8	180	1750	81,4	164,6						